


# MarForm



## MarForm MMQ 200 Cylindricity

|  
- 0 +

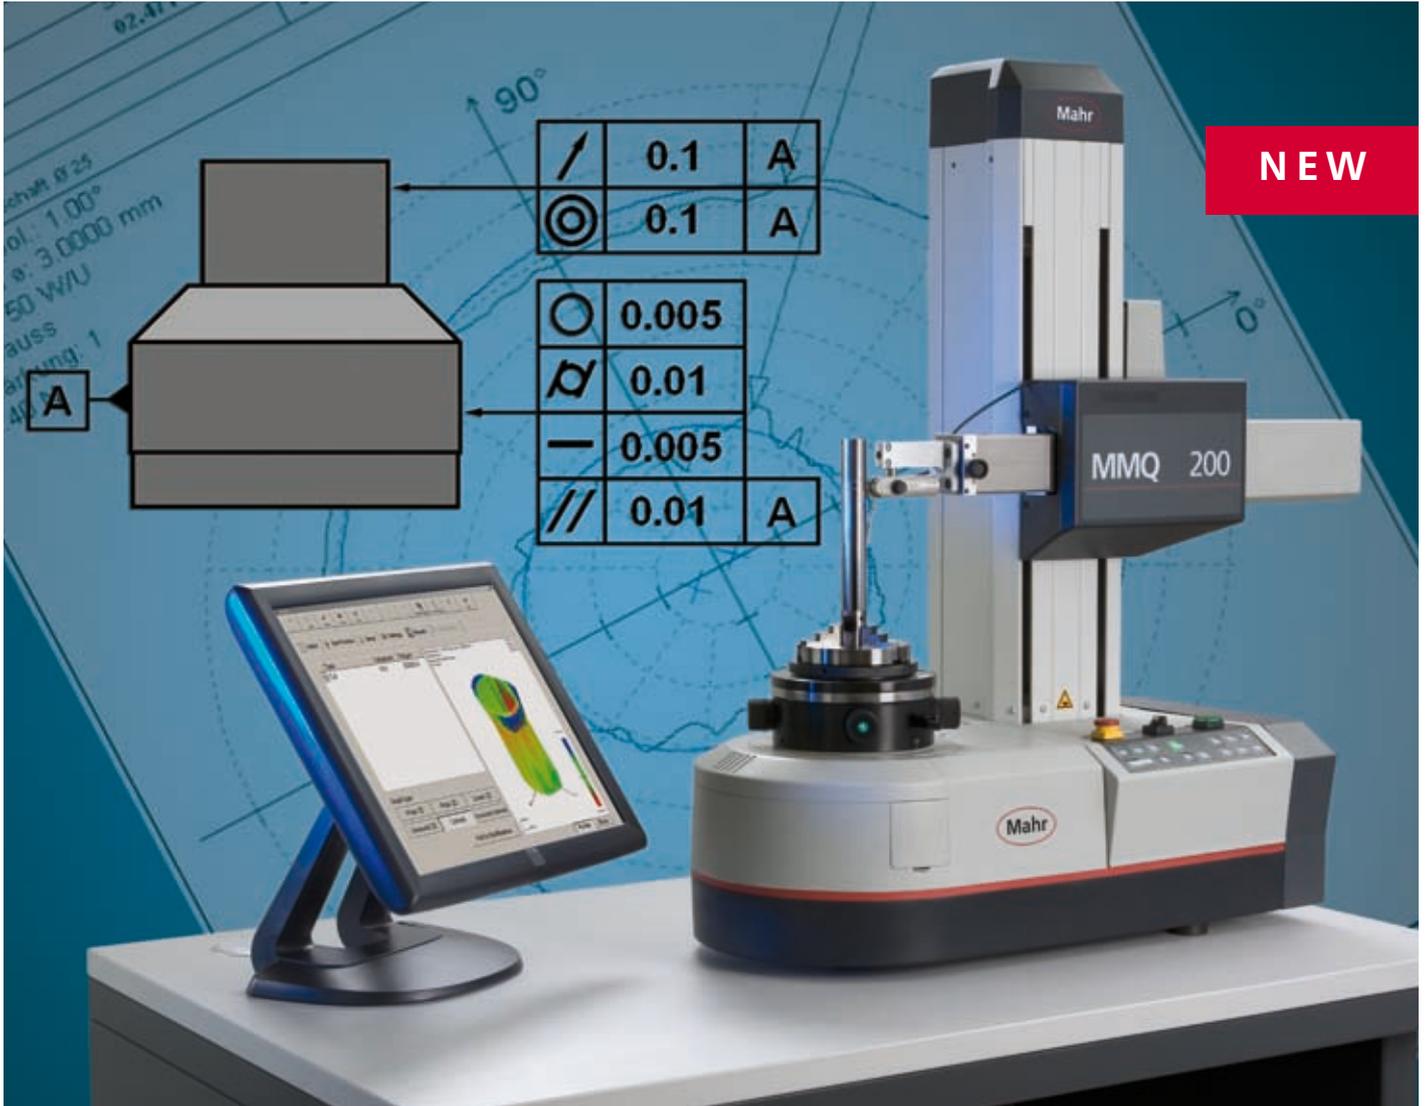

EXACTLY

► | Automatic measuring machine for testing deviations of form and position

- For use in the production area or in the measuring room
- Quick and easy handling
- High measuring accuracy, optimized for cylindricity
- Minimizes scrap, saves time and reduces production costs
- Selectable with either: universal probe T20W or motorized probe T7W



## MarForm MMQ 200

### Description

For proving the quality of your products, the MarForm MMQ 200 assesses the deviations of form and position as per DIN/ISO 1101 and documents them. Among these are:

- Roundness
- Straightness
- Flatness (from a polar trace)
- Parallelism
- Conicity
- Concentricity, coaxiality
- Run-out, total run-out
- Cylindricity
- Taper
- Perpendicularity (from a polar trace)
- Angularity
- Angle sector (roundness, flatness, run-out)
- Straightness evaluation sections

### Features

- High-precision measuring axis polar (C)
- Motorized measuring axis, vertical (Z)
- Motorized positioning axis, horizontal (X)
- Manual centring and tilting table
- Manual probe T20W or motorized probe T7W
- Ergonomical operator panel; special measuring programs can be started by pressing the keys (P1, P2, P3)


### Your advantages

- Immediately recognize production errors
- Minimize rework and scrap
- Document product quality
- Immediate use due to easy handling
- For production areas and measuring rooms

### The complete solution

Mahr delivers the complete solution for your measuring task.

- Competent technical advice, feasibility test on the intended scope of workpieces
- After-sales services: creation of measuring programs, and support for doing so, maintenance contracts, software maintenance contract, DKD calibration services, metrology and application training.
- One source for competence: production and development have both been in the same location for over 100 years.

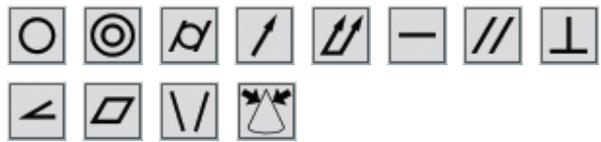

### Delivery scope

#### Delivery scope of "Measuring Station"

##### Order no.

9999485

- MarForm MMQ 200
- Probe T20W with probe arm
- Easy Form measuring, control and evaluation software
- PC with processors of the latest generation, Windows XP Professional
- 19" TFT monitor
- Color ink jet printer
- Rim chuck

#### Delivery scope of "Measuring Station"

9999486

- MarForm MMQ 200
- Probe T7W with probe arm
- Easy Form measuring, control and evaluation software
- PC with processors of the latest generation, Windows XP Professional
- 19" TFT Monitor
- Farbtintenstrahldrucker mit Kabel
- Rim chuck

### Options and accessories

- 17" TFT touchscreen monitor
- AdvancedForm Software (more functions and teach-in programming)
- Various clamping fixtures
- Probe arms with different lengths and probe ball geometries.
- Various calibration standards



## MarForm MMQ 200



### Software EasyForm 3.0

The EasyForm measuring, control and evaluation software is very simple to operate and does not require any programming knowledge. Consequently, your staff and your operating costs will profit from the minimum number of steps required to attain a record. For a roundness record just two steps are required. And the software guides you through every setting.

The EasyForm software remembers every step you made. Whether you would like to repeat the last measurements or if you decide to combine different measurements and evaluations of a workpiece to a "multifeature": The EasyForm teach-in mode will learn the steps. You can save up to 32 different measuring tasks under one of the programmable function keys.

The EasyForm software is based on the optimized MarWin measuring and evaluation routines and can be combined with other MarWin modules. It runs under Windows® XP Professional and includes functions for user administration, network support, for saving records to files; it can be extended with future options. EasyForm is the easiest way to operate a formtester.

- Prepositioning and parameter entry
- Measuring programs can be called up using function keys
- Random features in random order
- In addition to polar and linear profiles, helix and spiral profiles are also possible
- Functions for data processing, such as, for example, FFT and interactive exclusion of profile sections
- Customized measuring records including result charts and graphics
- 3D representation
- The records can be saved as, for example, PDF files
- Data export to, among others, QS-STAT (option) or text files

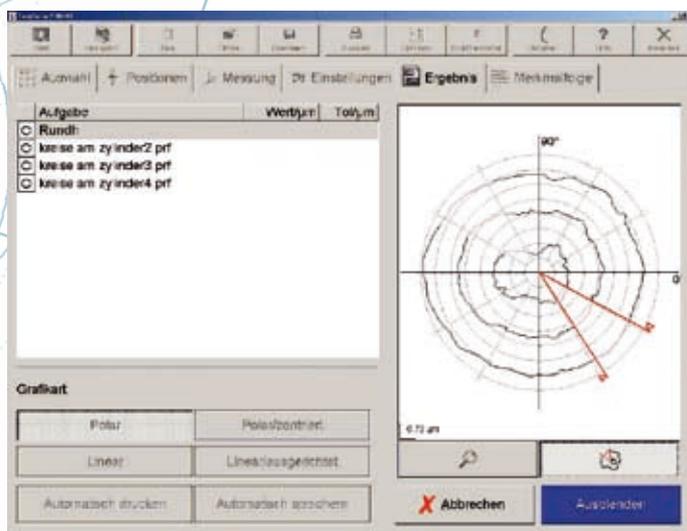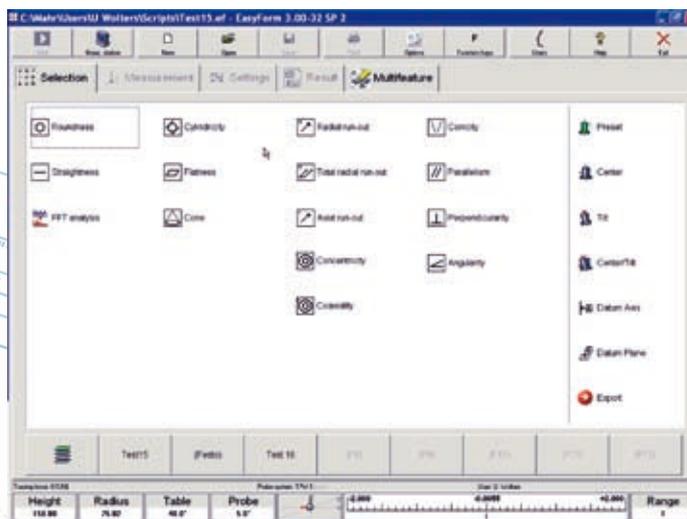

### Touchscreen monitor

EasyForm offers the possibility to operate either a normal TFT monitor or a touchscreen monitor, for which neither a keyboard nor a mouse is required. This is a useful alternative especially for use in production areas.


#### Features

- Intuitive user interface for immediate measurements
- Interactive creation of programs
- 3D representation of cylindricity, flatness and total run-out - in color and also with grid lines; creation in interactive graphic preview mode
- Immediate representation of the measuring results on the monitor
- Concise measuring records on the monitor, as a file (also in the network) or on paper (any Windows printer)
- Operating system: Windows® XP.



## MarForm MMQ 200

### Probe T20W

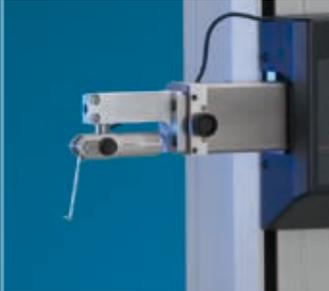

#### Probe T20W for MMQ 200

**Order no.** 5400152

- Inductive probe
- Adjustable probe arm angle  $\pm 95^\circ$  ( $190^\circ$ )
- Measuring range  $\pm 1000 \mu\text{m}$
- Adjustable measuring force
- Adjustable measuring direction
- Free travel limitation can be adjusted in measuring direction

### Probe T7W



#### Measuring probe T7W

**Order no.** 5400200

- Motorized probe
- Probe arm angle  $\pm 360^\circ$  motorically adjustable
- Probe arm angle in  $1^\circ$  increments
- Easily exchangeable probe arms (magnetic holder)
- Tracing direction adjustable in the program
- Mechanical and electrical overload protection

### Technical data

#### Roundness measuring device, C-axis

Run-out deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ measuring height)**	0.03 + 0.0006
Roundness deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ measuring height)*	0.015 + 0.0003
Run-out error, axia ( $\mu\text{m} + \mu\text{m}/\text{mm}$ measuring radius)**	0.04 + 0.0006
Roundness deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ measuring radius)*	0.02 + 0.0003

#### Centring and tilting table

Coarse and fine adjustment	manual
Table diameter	160 mm
Table capacity, centric	200 N
Rotary encoder (50 Hz / 60 Hz)	1 – 15 (1/min)

#### Vertical unit, Z axis

Measuring path, motorized	250 mm
Straightness deviation/100mm **	0.15 $\mu\text{m}$
Straightness deviation, overall **	0.3 $\mu\text{m}$
Parallelism deviation, Z/C axis	0.5 $\mu\text{m}$
Measuring speed	0.5 - 20 mm/s
Positioning speed	0.5 - 100 mm/s

#### Horizontal unit, X-axis

Positioning path, motorized	150 mm
Positioning speed	0.5 – 30 mm/s

#### Measuring volume

Testing diameter up to	210 mm
Measuring height up to	380 mm
Distance C/Z axis	218 mm

#### Dimensions, weight

Length	803 mm
Width	388 mm
Height	883 mm
Weight	approx. 120 kg

#### Connection data

Voltage	100 V up to 240 V (50 Hz up to 60 Hz)
---------	--

Power consumption	180 VA
Data connection to PC	USB 2.0 high speed

#### Location conditions

Ambient temperature	20°C $\pm$ 1K
Humidity	40% - 70% rel. hum.

\* Values as maximum deviation from reference circle LSC, at 20 °C  $\pm$  1 °C in oscillation-neutral environment, filter 15 upr at 5 rpm and with standard probe arm with ball  $\varnothing$  3 mm (0.12").

\*\* All values as per DIN ISO 1101 at 20 °C  $\pm$  1 °C in oscillation-neutral environment, filter: 15 upr LSC or 2.5 mm. LSS; speed: 5 rpm or 5 mm/s (0.2"/s) and standard probe arm with ball  $\varnothing$  3 mm (0.12").

Tested on a standard using compensation algorithms.

### Mahr GmbH Göttingen

P.O. Box 1853, D-37008 Göttingen  
 Carl-Mahr-Straße 1, D-37073 Göttingen  
 Phone + 49 551 7073-0, Fax +49 0551-71021  
 info@mahr.de, www.mahr.com

© by Mahr GmbH, Göttingen

We reserve the right to perform modifications to our products, particularly technical improvements and further developments. Illustrations and numerical data are therefore not binding.